

II A series



1U Rack-mountable LCD Drawer (KVM)






Brief Introduction

LX-1500 / 1700 / 1900 series integrates 15", 17" or 19" LCD, keyboard, touchpad and 1U high rack mountable kit with slide rail, is characterized by its "Easy Installation Rack Mount Kit", which streamlines the rack mounting process, making it easy for a single person to accomplish in a short time. Setup is fast and easy; plugging cables into their appropriate ports is all that is entailed.



Dimension

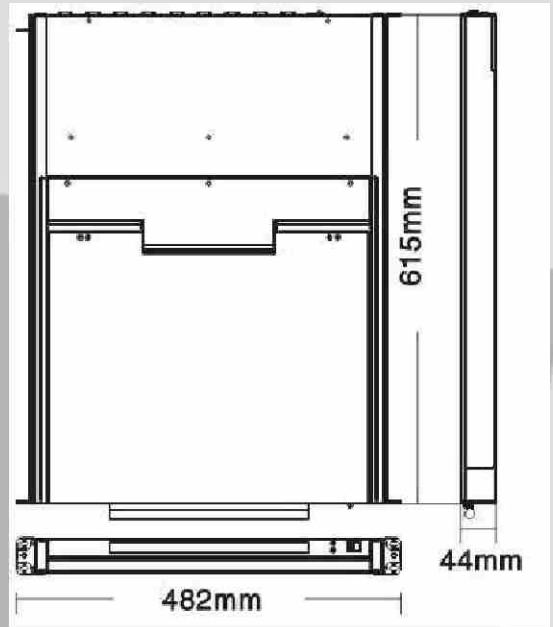

Back View



Features

- * Easy Installation Rack Mount Kit, which streamlines the rack mounting process, making it easy for a single person to accomplish in a short time.
- * Port Selection via pushbutton and OSD.
- * Security Mode (Password setting)
- * Built-in Keyboard (104 keys), Touchpad
- * The Slide Rail Pushing with "un-lock" automatically function
- * 1U RM high (Rackmountable)
- * Support operation system : Windows 2000, Windows XP, Windows Vista, LINUX

Specification

		Model	LX-1500/1700/1900	LX-1508/1708	LX-1516/1716
Function					
Computer	Direct		1	8	16
Connectors	Max		1	256 (Daisy Chain)	512 Daisy Chain)
Connect Port	Connect Port		1 x DB-15F	8 x DB-15F	16 x DB-15F
	Chain Port			1 x DB-15F	1 x DB-15F
Keyboard Mouse	Signal Style		PS/2	PS/2	PS/2
Display	OSD language		7 types	7 types	7 types
KVM	OSD language		--	8 types	8 types
Scan interval (OSD option)			--	User Specified : 5 - 99 sec	
LCD	Resolution		15" LCD : 1024 x 768 ; DDC2B		
			17" LCD : 1280 x 1024 ; DDC2B		
			19" LCD : 1280 x 1024 ; DDC2B		
	Contrast Ratio		15" LCD : 180 cd/m ² & 300 : 1		
			17" LCD : 300 cd/m ² & 800 : 1		
			19" LCD : 300 cd/m ² & 700 : 1		
Input pressure			100V 240V 47-63Hz		
Power	15" LCD		12W		
	17" LCD		30W		
	19" LCD		35W		
Operating Temperature			0°C ~ 50°C		
Storage Temperature			-20°C ~ 60°C		
Humidity			0% ~ 80% RH		
Material			METAL		
Color			Black		
Weight	15" LCD		13.5 Kg	13.7 Kg	13.9 Kg
	17" LCD		14 Kg	14.2 Kg	14.4 Kg
Dimension (LxVxH)			615mm x 48mm x 44mm (19" 1RU height)		
Range of depth for Rack Mount Kit			615mm - 1040mm		

Rack Mounting Demonstration

one person installation as Easy Three steps !

1 Fix the slider rack mount brackets to the 19" cabinet rails

2 Slide the KVM switch into the brackets



3 Mount the unit to the brackets using quick-release fastener. Then Slide it out and get to work.



KVM Cables

I Y series

